
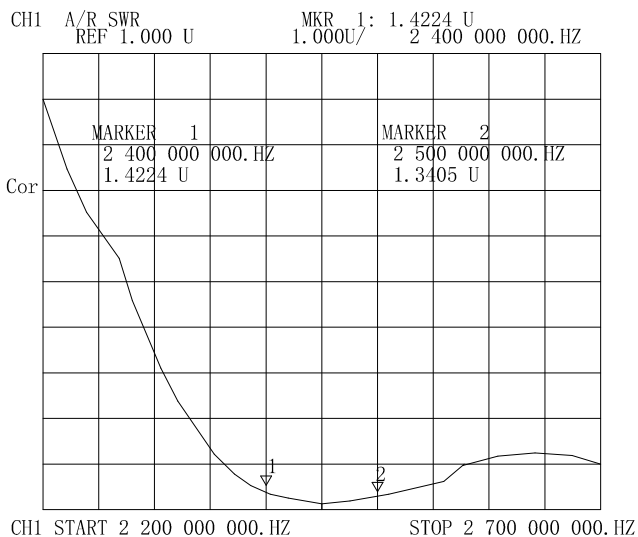


标注前有"*"重点检验尺寸

图面产品均符合ROHS标准

Kinghelm®

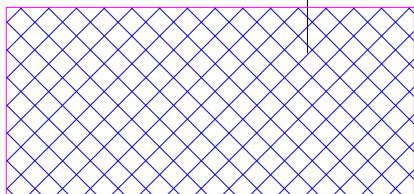

| Performance parameters | |
|------------------------|-------------------|
| Product name | 内置天线 |
| Model Type | KH-(2400)-K504-JB |
| Frequency Range | 2400-2500 MHz |
| Band Width | 100MHz |
| Vswr | ≤2.0 |
| Gain | 3DBi |
| Impedance | 50 OHM |
| Polarization | Vertical |
| Radiation | Omnidirectional |
| Max power | 10 W |
| material | FPC |
| Connector | IPEX1代 |
| Cable | RFφ1.13-50mm |
| Temperature | -35° -- 85° |
| Lighting protection | DC grounding |



部件材质工艺说明:

| 序号 | 物料名称 | 产品描述 | 数量 |
|----|---------------------|--------------------------------------|----|
| ① | Antenna element | FPC | 1 |
| ② | Installation method | 3M 300LSE | 1 |
| ③ | CABLE | RFφ1.13 COAXIAL CABLE 50ohm BLACK | 1 |
| ④ | CONNECTOR | IPEX 一代 | 1 |

深圳市金航标电子有限公司

| | | | | | | | | | | | |
|----|-------------|-------|------|----|-----|----|-----------------------|-----|----|----|------------|
| 公差 | .x | ±0.30 | 变更记录 | 日期 | 变更者 | 料号 | 编码 | | | | |
| | x.x | ±0.20 | | | | 品名 | 内置天线 | | | | |
| 图法 | x.xx | ±0.10 | 比例 | 纸张 | A4 | 型号 | YG-2.4G-1.13IPEX-50MM | | | | |
| | ANGULAR @5~ | 单位 | | | | MM | 版本 | A | 绘图 | 日期 | 2019.07.11 |
| | | 审核 | | | | | 页码 | 1/1 | | | |