



型号: KH-351519-TP


| Rev. | ECN Number | Description | Date | Drawn | Checked | Approved |
|------|------------|-------------|------|-------|---------|----------|
| | | | | | | |

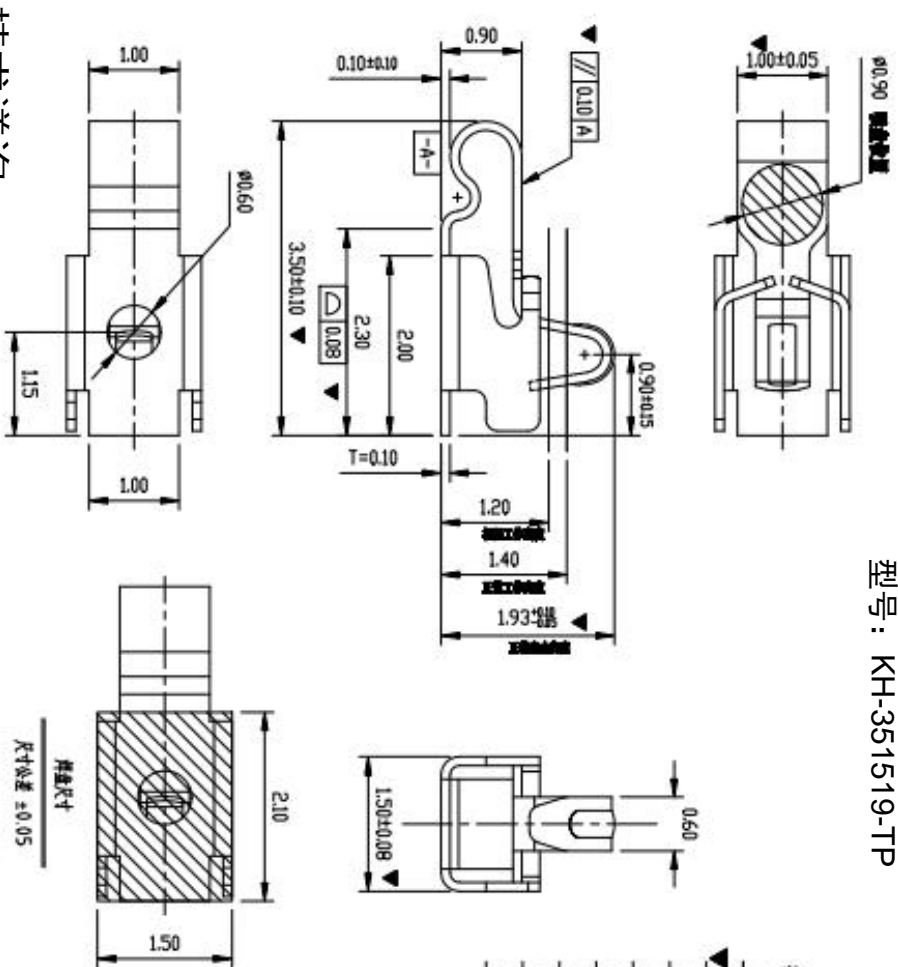

技术要求:

1. 材质: 不锈钢SUS304, T=0.10±0.005;
2. 端子铜牌焊接面和接触面不可有毛边, 其他部位毛边最大0.03mm;
3. 扭曲: 4.5°/1000mm, 拱形 5mm/1000mm;
4. 标示有“▼”符号的为重点控制和检验尺寸;
5. 未标注之R MAX R0.13;
6. 电镀须满足48小时盐雾测试;
7. 寿命测试>2万次, 产品弹力要求在60gf~80gf之间
8. 镀底50 80u"min, 焊接区域镀金, 接触区域镀金3U"MIN

技术详询



| GENERAL TOLERANCE | | SCALE: | DRAWN | DATE | DWG. NO. | REV. |
|-------------------|----------|----------|---------|------|-------------------------|-------|
| XX ±0.50 | X ±2.0° | 1:1 | CHECK | DATE | 681-0022A-1 | A |
| X ±0.25 | X ±1.0° | MM | APPROVE | DATE | PARTS NOT INTENDED USED | SHEET |
| XX ±0.15 | XX ±0.5° | SIZE: A4 | | | FDX0022A1 | 1/1 |

深圳市金航标电子有限公司