A4

REV	DESCRIPTION	APPD

Kinghelm®

型号：KH-IPEX-SMAKWE-B80H

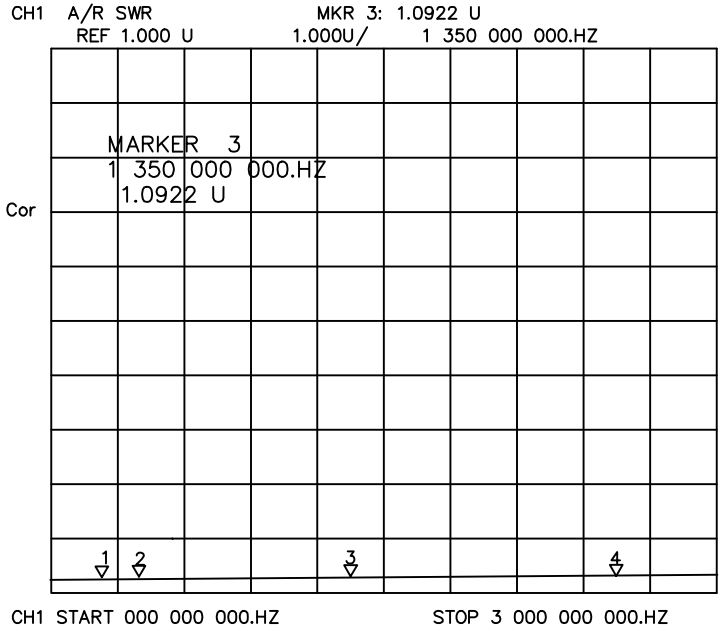

MAIN TECHNICAL SPECFICATIONS	
model Type	
FREQUENCY RANGE	0–3G
INPUT IMPEDANCE	50 OHM
VSWR	1:1.2
GAIN	----
POLARIZATION FORM	----
RADIATION	----
MAXIMUM POWER	----
CABLE	RF1.13– 80MM
MAX DIAMETER	13.6mm
MIN DIAMETER	1.13mm
CONNECTOR TYPE	IPEX -- SMAKWE
LIGHTING PROTECTION	DC GROUNDING

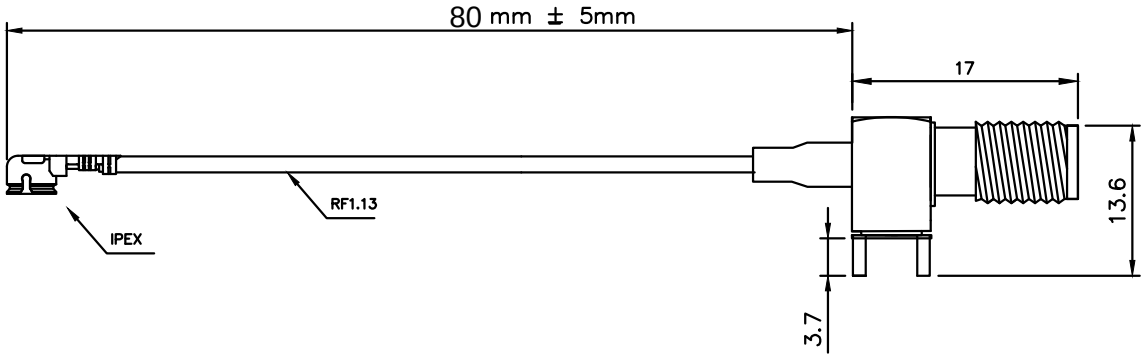



深圳市金航标电子有限公司

技术详询

DWN BY/DATE	DESG BY/DATE	TOLERANCE	SCALE		ENG PROJECT NO.	TITLE	
JIANG 2015-03-25		.X± .XX± .XXX± ANGLES±	1 : 1		KH150325–0025	KH–IPEX–SMAKWE– B80H	
CHK BY/DATE	APPD BY/DATE		UNIT m / m	SH 1 OF 1	CONTROL NO.	DWG NO.	REV

REFER TO: RADIOMETRIX P/N: