


型号: KH-IPEX3-SMA-RG081-100mm

REVISIONS				
REV	NUMBER	DESCRIPTION	DWN	CHK
A		DESIGN		

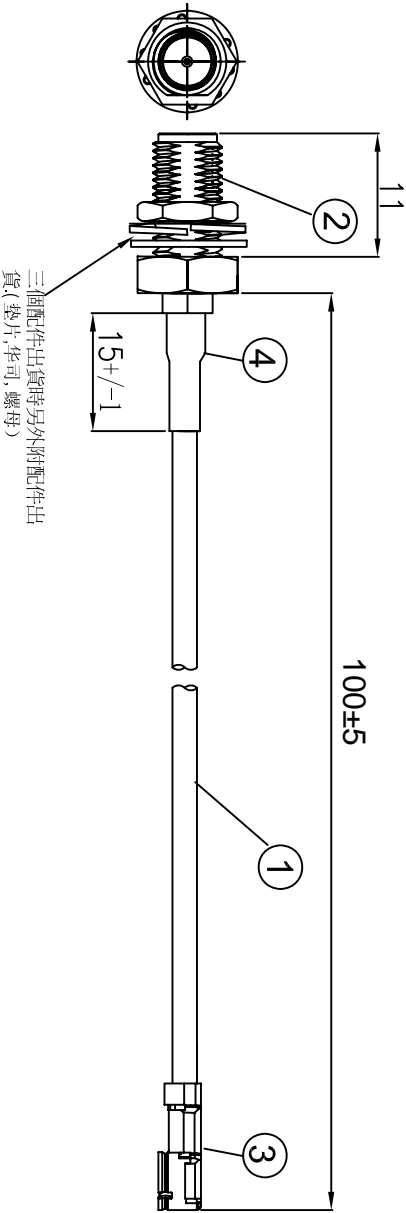

NOTES:

- ELECTRICAL:
  - VOLTAGE RATING:DCV 300V 10MS
  - CONDUCTANCE RESISTANCE:3.0 OHMMAX.
  - INSULATION RESISTANCE:5.0M OHM/MIN.
  - THE CABLE SHOULD BE 100% ELECTRICAL TEST
  - IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
- MATERIAL:
  - SEE TABLE
  - ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	套管	黑色热缩套管, OD:2.0MM	AS
③	端子	高仿IPEX 0.81 3代端子, 镀金	1
②	接头	SMA母头母针, 分体, 11牙, 镀金	1
①	同轴线	RF 0.81线材,颜色: 黑色, OD:0.81mm	AS

金航标电子有限公司

ALL DIMENSION ARE IN MM	DRAWN	DATE
	Jamy	2020-06-18

COMPUTER GENERATED IN SOLIDWORKS	MFG.
DO NOT SCALE THIS DRAWING	Q.A.


PROJECTION	GENERAL TOLERANCE FOR ANGLES
	X.X ± 1° X.XX ± 0.3 X.XXX ± 0.25 X.XXX ± 0.150

CUSTOMER P.N.:	SCALE: Free	TYPE	SHEET 1 OF 1
----------------	-------------	------	--------------

I-PEX 0.81 3代 TO SMA /F L=100 mm

SIZE	Number	REV
B		A

技术详询



4

3

2

1

4

3

2

1

A

B

C

D

A

B

C

D