


型号: KH-IPEX3-SMA-RG081-150mm

REVISIONS				
REV	NUMBER	DESCRIPTION	DWN	CHK
A		DESIGN		

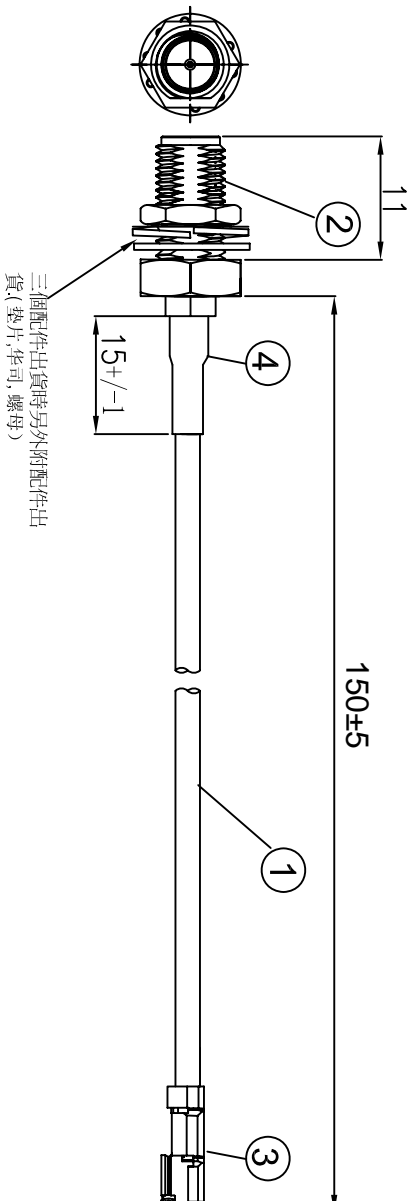

NOTES:

- ELECTRICAL:
 - VOLTAGE RATING:DCV 300V 10MS
 - CONDUCTANCE RESISTANCE:3.0 OHMMAX.
 - INSULATION RESISTANCE:5.0M OHM/MIN.
 - THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
- MATERIAL:
 - SEE TABLE
- ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	套管	黑色热缩套管, OD:2.0MM	AS
③	端子	高仿IPEX 0.81 3代端子, 镀金	1
②	接头	SMA母头母针, 分体, 11牙, 镀金	1
①	同轴线	RF 0.81线材,颜色: 黑色, OD:0.81mm	AS

金航标电子有限公司

ALL DIMENSION ARE IN MM

DRAWN	DATE
Jamy	2020-06-18

COMPUTER GENERATED IN SOLIDWORKS

MFG.

ENG.

DO NOT SCALE THIS DRAWING

Q.A.



GENERAL TOLERANCE FOR ANGLES X.X ± 1° X.XX ± 0.3 X.XXX ± 0.25 X.XXXX ± 0.150

I-PEX 0.81 3代 TO SMA /F L=150mm

SIZE Number

B

REV

A


SCALE: Free

TYPE

SHEET 1 OF 1

技术详询

CUSTOMER P.N.:



4

3

2

1

4

3

2

1

D

C

B

A

D

C

B

A