



# SPECIFICATIONS

Current Rating: 3Amps  
 Insulator body: L C P  
 Insulator Resistance: 5000Mw Min  
 Dielectric Withstanding: DC 500V  
 Contact Resistance: 20MW Max  
 Durability: 100gf Cycls Min  
 Contact Material: Copper alloy  
 Finish : Tin Gold or Duplex plated  
 Standard: Gold flash all over Nickel  
 Operating Temperature: -55°C+105°C  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

注明:带号码球的为检验尺寸,带▲为重要检验尺寸

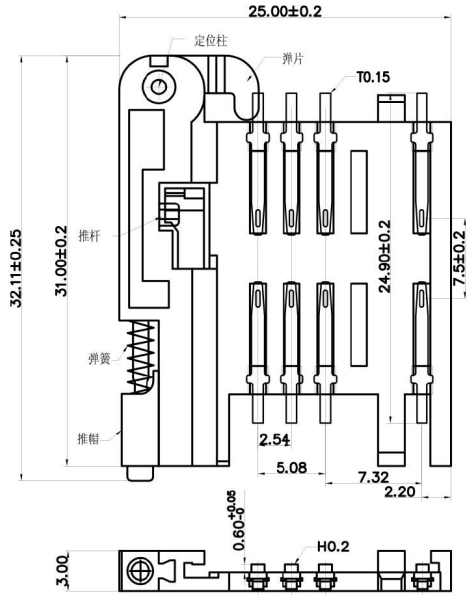

主体

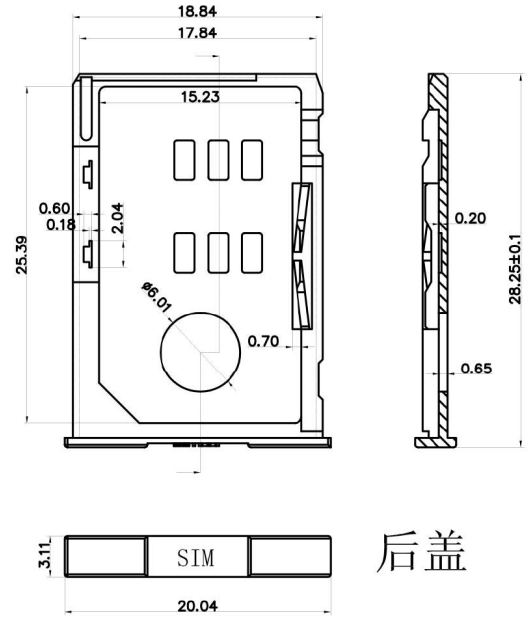


后盖

## Ordering Information

7420 08 M S3 B T 04


No.of Pins Per Row 08=8P	Connector Type S=Straight R=Right Angle M=SMT	Contact Plating G0:Gold Flash G2:1.5U" Gold G3:2U" Gold G4:3U" Gold G5:5U" Gold S0:Gold Flash/Tin S3:5U"Gold Flash/Tin SN:Tin	Insulator Color B=Black G=Grey
--------------------------	---	---	--------------------------------

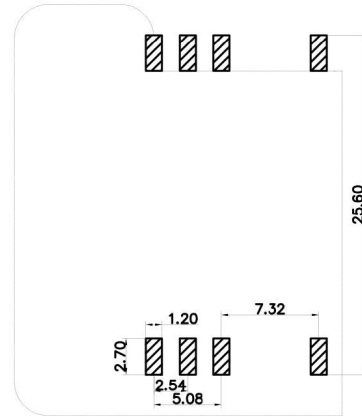

RECOMMEND P. C. BOARD LAYOUT

PCB TOLERANCE:±0.05 (TOP VIEW)

技术详询



型号: KH-SIM2-2.54-8F		OPERATION		DRAW	WZG	14.04.11	SCALE	FIT	深圳市金航标电子有限公司	
		X.X	±0.30	CHECK			UNIT	mm		
		X.XX	±0.20				SIZE	A4		
		X.XXX	±0.10				SHEET	1/1	PART NO.	742008MS3BT04
AO	2012.09.11	NEW DRAWING		Angle	±3°	APPROVE			TITLE:	A卡座 8P
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL		PROJ.	◆	客户料号:	