

4


3

2

1

# Kinghelm®

REV. NUMBER		DESCRIPTION		DWN	CHK	DATE
A		DESIGN				

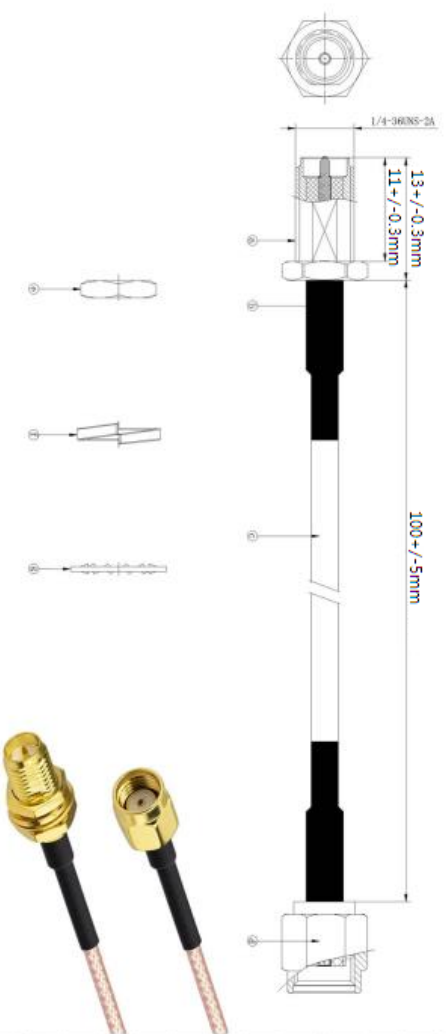

三個配件出貨時另外附配件出貨(2个华司，1个螺母)

cal loss => 0.1--0.3dbm

B

- NOTES:
- ELECTRICAL:
    - VOLTAGE RATING:DCV 300V 10MS
    - CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
    - INSULATION RESISTANCE: 5.0M OHM/MIN.
    - THE CABLE SHOULD BE 100% ELECTRICAL TEST
    - IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES
  - MATERIAL:
    - SEE TABLE
  - MECHANICAL:
    - SMA PULL FORCE: 12.0KGS.
  - ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	套管	黑色热缩套管, OD: 4.0mm	AS
③	线损	01---0.3dbm	1
②	接头	SMA内螺内孔转外螺内针, 11牙镀金	1
①	同轴线	RG316 OD: 2.4MM	AS

B

C

C

D

D

## 金航标电子有限公司

型号:KHB(RG316)-SMA-100-28


RF CABLE SMA 300MM

ALL DIMENSION ARE IN MM	DRAWN	DATE	TITLE
ENG.	Jamy	2018/05/04	型号:KHB(RG316)-SMA-100-28
COMPUTER GENERATED IN SOLIDWORKS	MFG.		
DO NOT SCALE THIS DRAWING	Q.A.		
PROJECTION	GENERAL TOLERANCE FOR ANGLES	± 1°	
	XX	± 0.3	
	XXX	± 0.25	
	XXXX	± 0.150	
SIZE	Number	REV	
B		A	
SCALE: Free	TYPE	SHEET	1 OF 1

A

A

技术详询



CUSTOMER PIN:

4

3

2

1